



Member of Sumitomo Drive Technologies

Crane and Hoist Systems

Variable Frequency Drives

Applications




Cranes and Hoists Control

Accurate and precise motion governing of all motor types with a multitude of techniques.

The **Optidrive P2** features advanced control algorithms that manage the hoist brake sequence securely and reliably, eliminating the need for a costly, failure-prone motor encoder.

Hoist Speed Optimisation

Optimise hoist speed in the motor field weakening area.

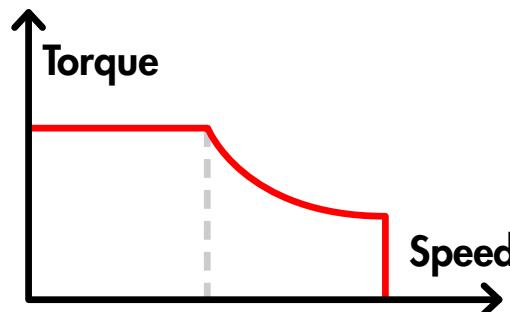

Torque Proving

Ensures a motor generates sufficient torque before releasing a brake in applications like hoists & cranes. The VFD applies a current to the motor to build torque without rotation. Once the drive confirms that the torque meets the required threshold, it signals the system to safely release the brake or proceed with the operation.

Cranes



Requirements:

- High starting torque
- Smooth motor operation throughout starting and stopping phases
- Motor holding brake control
- Avoidance of load droop and sag
- Regeneration and braking capability during load lowering

Optidrive P2 provides:

- Dedicated Hoist Mode Operation with motor holding brake control algorithm
- Up to 200% torque from zero speed in vector operation without encoder feedback
- Multiple Preset Speed or variable speed operation
- Built in dynamic braking transistor, requires only an external resistor

IM

IE2 & IE3
Induction Motors

PM

AC Permanent
Magnet Motors

Options & Software

A range of external EMC filters, brake resistors, input chokes and output filters are available.

Brake Resistors

Dissipating Regenerative Energy

When a motor decelerates, especially in high-inertia systems, it acts like a generator and sends energy back into the VFD. This energy increases the DC bus voltage. A brake resistor safely dissipates this energy as heat, preventing overvoltage faults.

Built in brake channel

An internal circuit designed to manage excess energy generated during motor deceleration. When a crane motor lowers, it generates energy that flows back into the VFD. This causes the DC bus voltage to rise too high; the brake channel helps manage this.

External Keypad

Displays to control or monitor your Invertek Drive.



Optistick Smart



NFC

Bluetooth®

Rapid Commissioning Tool

- Allows copying, backup and restore of drive parameters
- Provides Bluetooth interface to a PC running OptiTools Studio or the OptiTools Mobile app on a smartphone
- Onboard NFC (Near Field Communication) for rapid data transfer

OPT-3-STICK-IN

Modbus RTU CANopen®

on board as standard



IP20

Up to 250kW



IP55



Up to 250kW



IP66

Up to 30kW



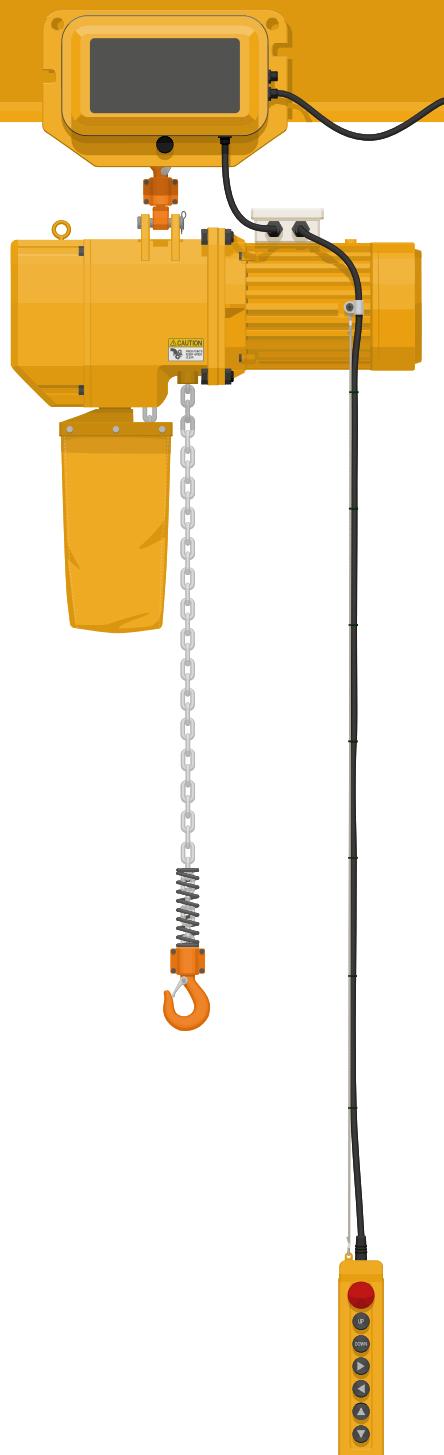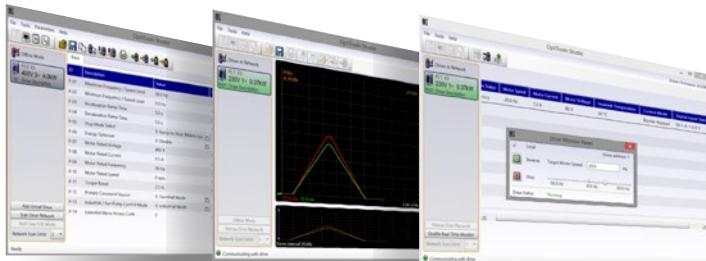

In-depth Scope Function

The Scope Function enables real-time display and logging of signal levels from within the connected drive. It is primarily designed as a commissioning and fault-finding tool, allowing users to visualize the drive's operation.

Powerful PC Control

Drive commissioning and parameter backup

- Powerful PC based commissioning and programming software
- Multi Drive Network Support

Supports 2 key functions

- Function Blocked Based PLC Logic Programming
- Advanced Drive Control Functions
- Multiple Functions can be easily combined to produce powerful solutions
- Program protection to prevent unauthorised copying

Complete flexibility and easy support for OEMs!

Cranes



Overhead Cranes



Gantry Cranes



Jib Cranes



OPTIDRIVE™ CP²

0.75 - 250kW
200-600V Single & 3 Phase Input

Powerful Performance

Advanced Motor Control

IP20 IP55 IP66

Dedicated Hoist Mode

- ✓ Fast, Safe commissioning
- ✓ Intended for typical crane and hoist applications
- ✓ Dedicated on board 'Hoist' Mode, enabled by single parameter
- ✓ Safe operation
- ✓ Open Loop vector control gives excellent performance for Crane applications



3GV Vector Control

- ✓ Accurate control of motor speed and torque
- ✓ "Shear Pin" torque limit
- ✓ Dedicated Brake Control.
- ✓ High Starting torque for applications, Hoists
- ✓ Accurate control for applications, e.g.
- ✓ Winding tensions control
- ✓ Simple, fast commissioning with only basic parameter settings required

150% Overload
for 60 seconds

200% Overload
for 3.75 seconds

Optidrive™ E3

0.37 - 37kW
110-480V Single & 3 Phase Input

General Purpose Drive

Easy control for all motor types

IP20 IP66

Lateral Motion Control

Low Power Applications

- ✓ Dedicated to low power applications, Optidrive E3 combines innovative technology, reliability, robustness and ease of use in a range of compact IP20 & IP66 enclosures.

Simple Commissioning

- ✓ 14 parameter basic setup. Default settings suitable for most applications. Contactor style connection for simple wiring.

Industrial Mode

- ✓ Optimises Optidrive E3 for load characteristics of typical industrial applications

Torque control saves time Sensorless Motor Control

Supports sensor-less control for PMAC and BLDC motors, eliminating encoders and simplifying installation.

High Torque and Smooth Operation

Delivers high starting torque with smooth acceleration and deceleration to reduce load swing.


Safety and Efficiency Features

Includes anti-sway control and dynamic braking for enhanced safety and operational efficiency.

Energy Saving and Diagnostics

Adapts motor speed to load for energy efficiency and offers integrated diagnostics for easy monitoring.

Proven Worldwide Solution in Crane and Hoist Systems

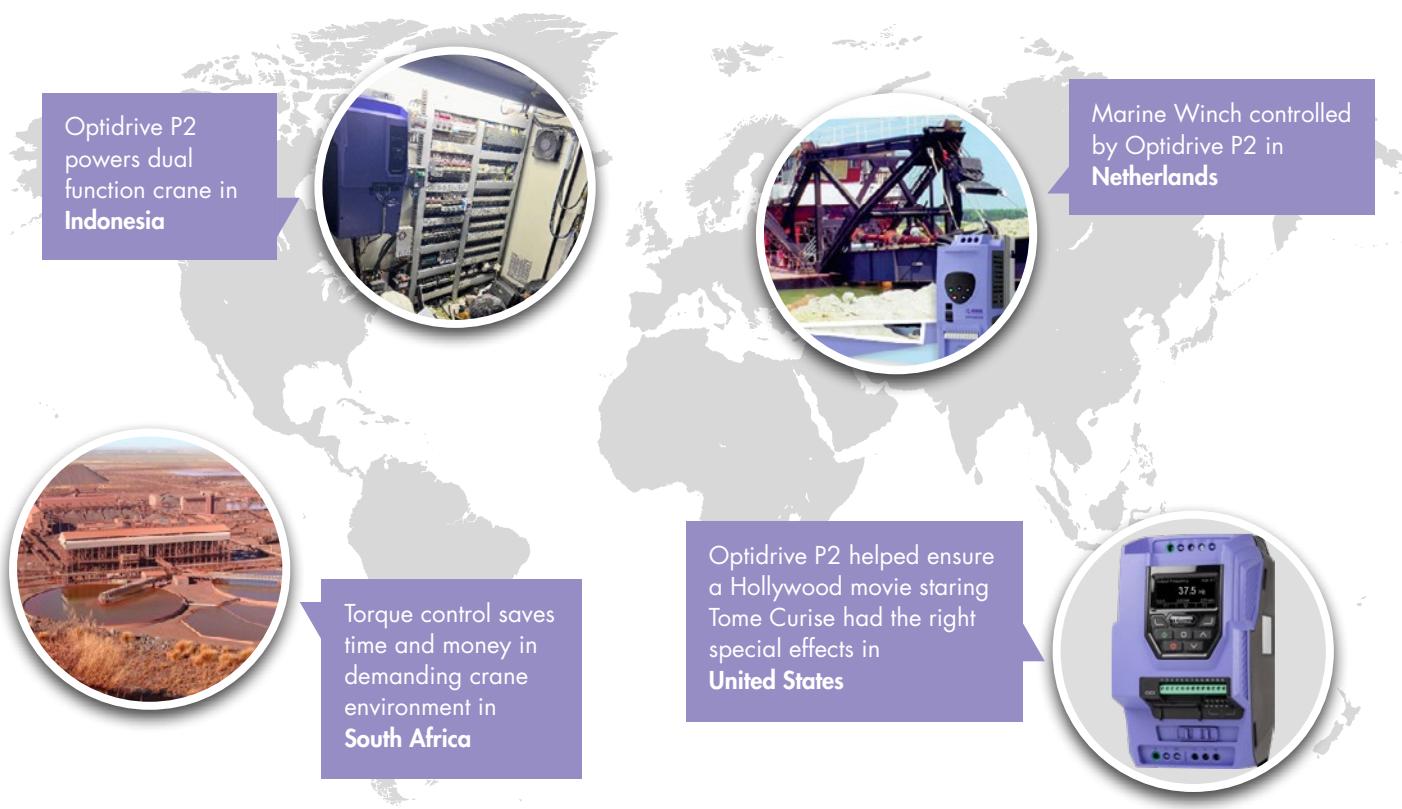

Scan here to view all our case studies online

www.invertekdrives.com

INVERTEK DRIVES LIMITED UK Headquarters

Offa's Dyke Business Park
Welshpool, Powys, UK
SY21 8JF

Tel: +44 (0)1938 556868
Fax: +44 (0)1938 556869
Email: sales@invertekdrives.com

